






Balance series WLC are designed for fast and precise mass determination in laboratory and industrial conditions. They can also be used in areas with no access to mains (240V), as their standard equipment they includes internal rechargeable battery and RS232 output. All kinds of this balance (pan size: 128×128, 125×145, 195×195, 290×360 and 400×500 mm) are equipped with stainless steel weighing platform and backlit LCD display providing good reading of weighing result.

Balances WLC A2 have the possibility of weighing loads outside weighing platform (so called under hook weighing), where a load is hanged under the instrument. This is an alternative for weighing loads with non-standard dimensions and shapes. This means of weighing is also useful for determination of density of solids and liquids with application of standard functions of the balance.

-  Counting pieces
-  Checkweighing
-  Percentage
-  Caps lock of max indication
-  Measurement in Newton

Technical data:

	WLC 0,6/B1*	WLC 1,2/B1*	WLC 1/A2	WLC 1,2/3/A2*	WLC 2/A2	WLC 3/6/A2*	WLC 6/A2	WLC 6/12/A2*	WLC 10/A2	WLC 20/A2
Max capacity	0,6 kg	1,2 kg	1 kg	1,2/3 kg	2 kg	3/6 kg	6 kg	6/12 kg	10 kg	20 kg
Readability	0,01 g	0,02 g	0,01 g	0,02/0,05 g	0,01 g	0,05/0,1 g	0,1 g	0,1/0,2 g	0,1 g	0,1 g
Tare range	-0,6 kg	-1,2 kg	-1 kg	-3 kg	-2 kg	-6 kg	-6 kg	-12 kg	-10 kg	-20 kg
Repeatability	0,01 g	0,02 g	0,03 g	0,02/0,05 g	0,03 g	0,05/0,1 g	0,2 g	0,1/0,2 g	0,2 g	0,2 g
Linearity	±0,01 g	±0,02 g	±0,03 g	±0,02/0,05 g	±0,03 g	±0,05/0,1 g	±0,2 g	±0,1/0,2 g	±0,2 g	±0,2 g
Pan size	125 × 145 mm		195 × 195 mm							
Power supply	240V / 11V AC, Battery									
Stabilization time	3 s									
Working temperature	+15° - +30 °C									
Display	LCD (backlit)									

* NMI APPROVAL PENDING

Technical data:

	WLC 6/C1/R	WLC 6/12/C1/R*	WLC 12/C1/R	WLC 12/30/C1/R*	WLC 30/C1/R	WLC 30/60/C2/R*	WLC 60/C2/R	WLC 60/120/C2/R*	WLC 120/C2/R	
	WLC 6/C1/K	WLC 6/12/C1/K*	WLC 12/C1/K	WLC 12/30/C1/K*	WLC 30/C1/K	WLC 30/60/C2/K*	WLC 60/C2/K	WLC 60/120/C2/K*	WLC 120/C2/K	
Max capacity	6 kg	6/12 kg	12 kg	12/30 kg	30 kg	30/60 kg	60 kg	60/120 kg	120 kg	
Readability	0,1 g	0,1/0,2 g	0,2 g	0,2/0,5 g	0,5 g	0,5/1 g	1 g	1/2 g	2 g	
Tare range	-6 kg	-12 kg	-12 kg	-30 kg	-30 kg	-60 kg	-60 kg	-120 kg	-120 kg	
Repeatability	0,3 g	0,1/0,2 g	0,6 g	0,2/0,5 g	1,5 g	0,5/1 g	3 g	1/2 g	6 g	
Linearity	±0,3 g	±0,1/0,2 g	±0,6 g	±0,2/0,5 g	±1,5 g	±0,5/1 g	±3 g	±1/2 g	±6 g	
Pan size	290 × 360 mm					400 × 500 mm				
Power supply	240V / 11V AC, Battery									
Stabilization time	3 s									
Working temperature	+15° - +30 °C									
Display	LCD (backlit)									

* NMI APPROVAL PENDING

Additional equipment:

PRINTER RHA- 343 THERMAL PRINTER


RACK FOR UNDER HOOK WEIGHING

SUITCASE FOR BALANCE


NuLink BALANCE SOFTWARE

LabGen LABORATORY SOFTWARE


B1 version

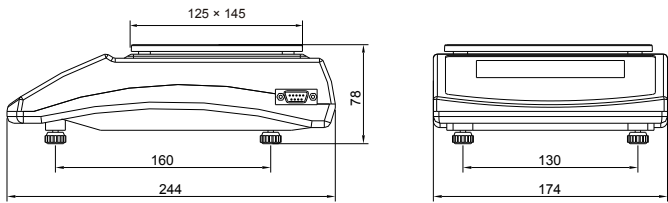




A2 version

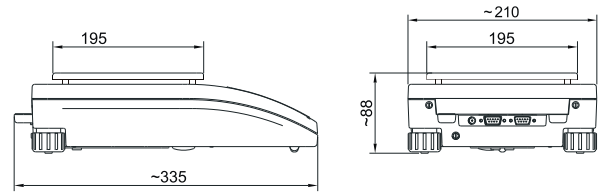

/K version

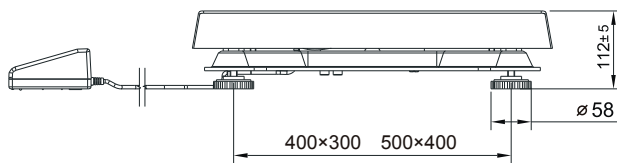

/R version

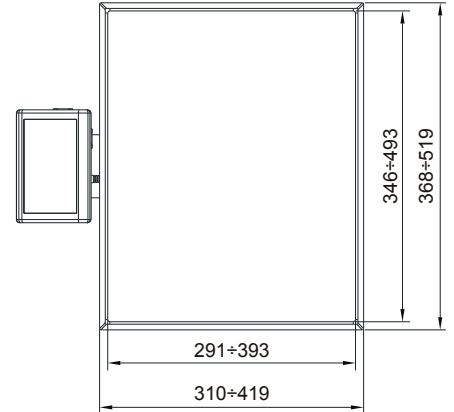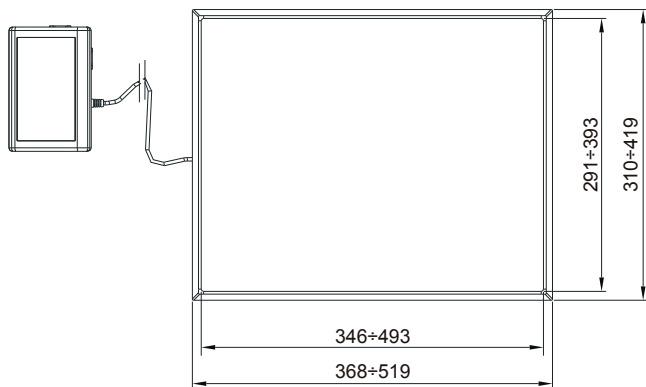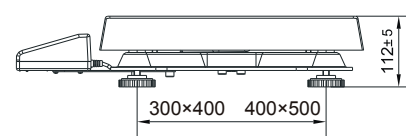

NUWEIGH AUSTRALIA

104 -114 Hannell Street Wickham NSW 2293 | T: 02 4961 4554 | F: 02 4962 1137
 E: sales@nws.com.au | W: www.nuweigh.com.au

